


HYDRO'K

INDUSTRIAL MAINTENANCE

Oil

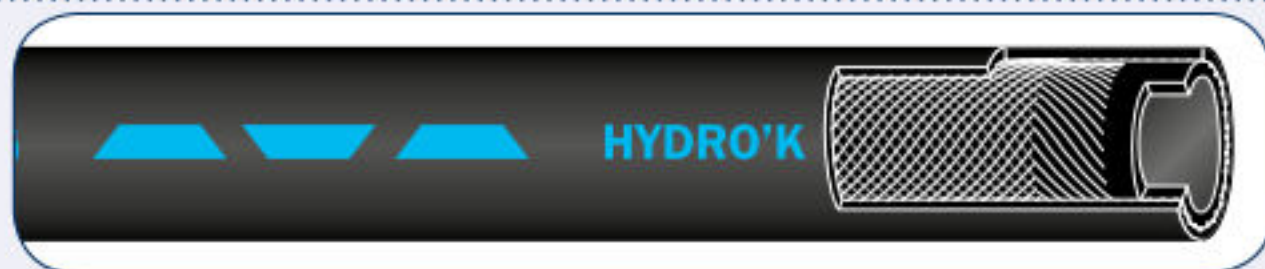

Applications

A versatile hose for industrial use.

For diesel oil, mineral oil and grease with aromatic content $\leq 50\%$.

Return hose in hydraulic system and for farming equipment.

Sea water (engine cooling) and aqueous solution.

An allround hose for oil, water, compressed air, grease, etc.

Advantages

- A multi-purpose hose to minimise inventory.
- Ozone, abrasion and oil splash resistant cover.

Technical description

Inner tube: oil resistant NBR/PVC, black, smooth.

Reinforcement: synthetic textile.

Cover: oil and weather resistant NBR/SBR, black, smooth.

Temperature range: - 25 °C to + 100 °C.

ID	Wall thickness	OD	Working pressure	Bursting pressure	Max. vacuum	Bending radius	Weight	Length	Notes	
mm	mm	mm	bar	bar	bar	mm	kg/m	m		
5.0	± 0.4	3.25	11.5	± 0.5	16	48	0.80	30	0.12	40 - 120
6.0	± 0.4	3.50	13.0	± 0.5	16	48	0.80	35	0.15	40 - 80 - 120
8.0	± 0.5	3.50	15.0	± 0.6	16	48	0.80	40	0.18	20 - 40 - 80 - 120
10.0	± 0.5	3.50	17.0	± 0.6	16	48	0.80	45	0.22	20 - 40 - 50 * - 80 - 120
13.0	± 0.6	3.75	20.5	± 0.7	16	48	0.35	50	0.27	20 - 40 - 50 * - 80 - 120
15.0	± 0.7	4.00	23.0	± 0.8	16	48	0.35	55	0.32	40 - 80 - 120
16.0	± 0.7	4.00	24.0	± 0.8	16	48	0.35	60	0.34	40 - 80
19.0	± 0.7	4.20	27.4	± 0.8	16	48	0.35	65	0.42	20 - 40 - 80
25.0	± 1.0	5.00	35.0	± 1.0	16	48	0.35	80	0.68	20 - 40 - 80

* Packed in carton.

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:



TRELLEBORG

HYDRO'K ID Ø WP 16 bar - Made in France